



Part No: 900119MIX-W: Balanced flow laboratory monobloc mixer tap, removable nozzle

Description: Fixed swanneck hot and cold mixer tap.

Applications: Standard laboratory mixer water tap for all applications where header tank supply is

present (Full WRAS approval)

Options: Full-bore nozzle or lever operation is available on request. **Construction**: All brass body Rilsan plastic coated, white (RAL9016). Grey ABS rotating handwheels, Identification coding to DIN13792

Connection and mounting: 2 x 3/8" BSP female flat ended flexible braided SS hoses, 330mm long.

Mounting hole: 36mm diameter.

Pressure and Flow: Maximum pressure 100PSI (Recommended 20PSI)

Flow Rate @ 20 psi = 35 Litre/min.

Spares: Spare handwheel assembly: Pt No 960180

Valve headworks, Pt Nos 950148

WRAS: Approved materials.

ARBOLES UK LTD

Unit 56 • Flexspace Business Centre • Manchester Road • Bolton • BL3 2NZ T: 0044 (0)1204 388814 F: 0044 (0)1204 388813 sales@arboles.co.uk www.arboles.co.uk














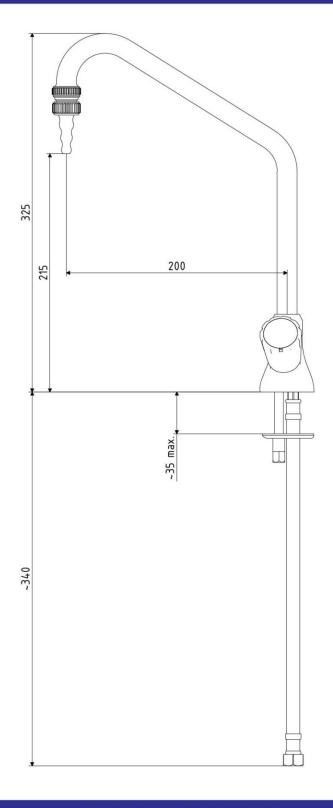

ARBOLES UK LTD

Unit 56 • Flexspace Business Centre • Manchester Road • Bolton • BL3 2NZ T: 0044 (0)1204 388814 F: 0044 (0)1204 388813 sales@arboles.co.uk www.arboles.co.uk











