PRODUCT FEATURES

FEATURES	STANDARD	OPTIONAL
Aluminum Composite Panels	✓	
Anodized Aluminum Frame	✓	
Flow Regulating 2000L Insulated Tank	✓	
3kW Heating Element & Temperature Controller	✓	
Easily Replaceable Fittings	✓	
M10 Anchor Points	✓	
Concealable Fork Pockets	✓	
Removable Lifting Eyes	✓	
Fill Level Indicator	✓	
Stainless Steel Activation Handle with Testing Lever	✓	
Rear Service Door	✓	
Drop Down Ceiling Panel	✓	
Hinged Roof	✓	
IP Rated Control Box with Isolator	✓	
RCD Protected	✓	
High Grade Tank and Pipe Insulation	✓	
Stainless Steel Shower Rose	✓	
Trace Heating	✓	
Sounder Beacon		✓
Frost Proof Eyewash		✓
PIR Activated LED Ceiling Lights		✓
LED Roof Downlighting (Changes Colour on Activation)		✓
Walk on Treadle Plate		✓
Remote Monitoring & Activation System		✓
Premium Graphics		✓

ARBOLES

ARBOLES.CO.UK

CALL
01204 388 814

2000L EMERGENCY TANK SHOWER

PRODUCT FEATURES

2000L
IMMERSION HEATED
INSULATED TANK

SECURE ACCESS
TO ALL SERVICES
& COMPONENTS

TWO PART
DETACHABLE
DESIGN

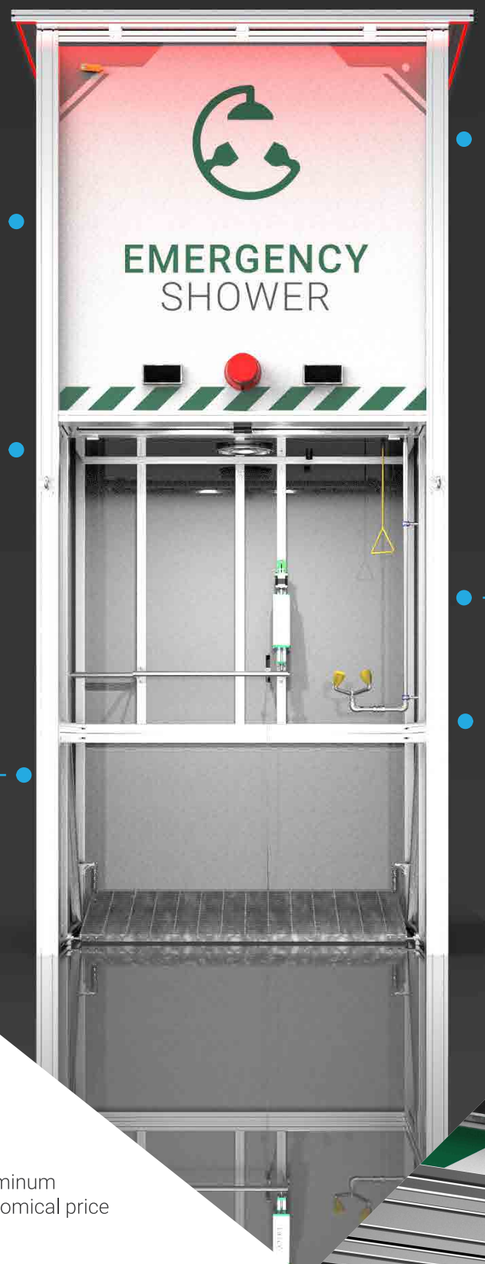

COLOUR CHANGING
PERIMETER LIGHTS

REMOTE MONITORING
& ACTIVATION

FROST PROTECTED
EYEWASH DESIGN

The Entex 2000L emergency tank shower offers the reassurance in environments where constant supply of water or adequate water pressure cannot be guaranteed. Meeting and exceeding the requirements of the ANSI Z358.1 standard the product is available with a range of different features to suit your needs.

The high gloss composite body coupled with an anodized aluminum frame creates a high end, premium aesthetic despite the economical price tag.

The activation mechanism has been specifically designed to offer reliability, durability and a smooth, seamless action. Only high quality fittings are used to maximise the products lifespan and ensure it always functions when it is needed.

The two part detachable design alleviates the need for specialist transport and also means that the base can be delivered to site, installed and the services connected prior to the delivery of the main unit. Concealable fork lift pockets and removable lifting eyes give you multiple options to safely lift and position the unit on site.

A cavity at the rear of the unit keeps all the critical services such as the plumbing and electrics securely and neatly out of sight and allows access only to authorised personnel. A secure hinged roof, drop down ceiling panel and a rear service door allow you to access all of the componentry easily and safely.

An optional digital monitoring system facilitates the remote monitoring and control of your emergency tank shower, automatically testing that everything is in working order.

ADDITIONAL INFORMATION

CAPACITY:	2000 Litres
DIMENSIONS :	(H)3700mm x (W)1506mm x (L)1636mm - Assembled
INTERNAL HEIGHT:	2150mm
MATERIAL:	Anodized Aluminum Frame, Aluminum Composite Panels
PLUMBING:	1" BSP Cold Water Inlet
FIXINGS:	M10 Anchor Points
LIFTING:	x4 M12 Lifting Points & Fork Pockets