

# 1500L TANK SHOWER

**MODEL: TS1500-P3**

Suitable for all climates and fully compliant with ANSI Z358.1-2014 and EN15154 standards, this tank shower guarantees over 15 minutes of tepid water without the need of a mains water supply. The unit is completely corrosion resistant and suitable for hazardous or non-hazardous environments. Comes with water heater with temperature display, water level indicator, testing lever, side and rear panelling, and tank-fed eyebath.

## KEY FEATURES

- Over 15 minutes tepid water
- Manufactured in house, in the UK
- Photoluminous pictorial signs
- One-piece insulated GRP header tank



 MADE IN  
BRITAIN


## TECHNICAL DETAILS

<b>CLASSIFICATION</b>	Non-hazardous
<b>POWER SUPPLY</b>	240V 1PH 50Hz
<b>WATER SUPPLY PRESSURE</b>	0.5 - 6 bar
<b>INLET CONNECTION</b>	1" BSPM
<b>SCREENED OVERFLOW</b>	40mm PVC-U
<b>SHOWER FLOW RATE</b>	76lpm
<b>EYEBATH FLOW RATE</b>	Min 1.5lpm
<b>BALL FLOAT VALVES for quick refill</b>	2 x 3/4" stainless valves with 6" plastic floats
<b>SHOWER OPERATION</b>	Panic bar
<b>EYEBATH OPERATION</b>	Lift lid
<b>SIGNAGE</b>	Self-adhesive photoluminous pictorial sign
<b>WATER HEATER</b>	2.5Kw (Stat set at 18°C)

## MATERIAL DETAILS

<b>HEADER TANK</b>	1500L yellow insulated GRP
<b>HEADER TANK LID</b>	White insulated GRP
<b>SHOWER FRAME</b>	304 stainless steel
<b>OPERATING VALVES</b>	Stainless steel
<b>SHOWER ROSE</b>	Yellow - ABS
<b>PANIC BAR/TESTING LEVER</b>	Stainless steel (powder coated red for high visibility)
<b>PANELLING</b>	Side & rear - green GRP
<b>EYEBATH</b>	Yellow GRP + 2 low pressure nozzles



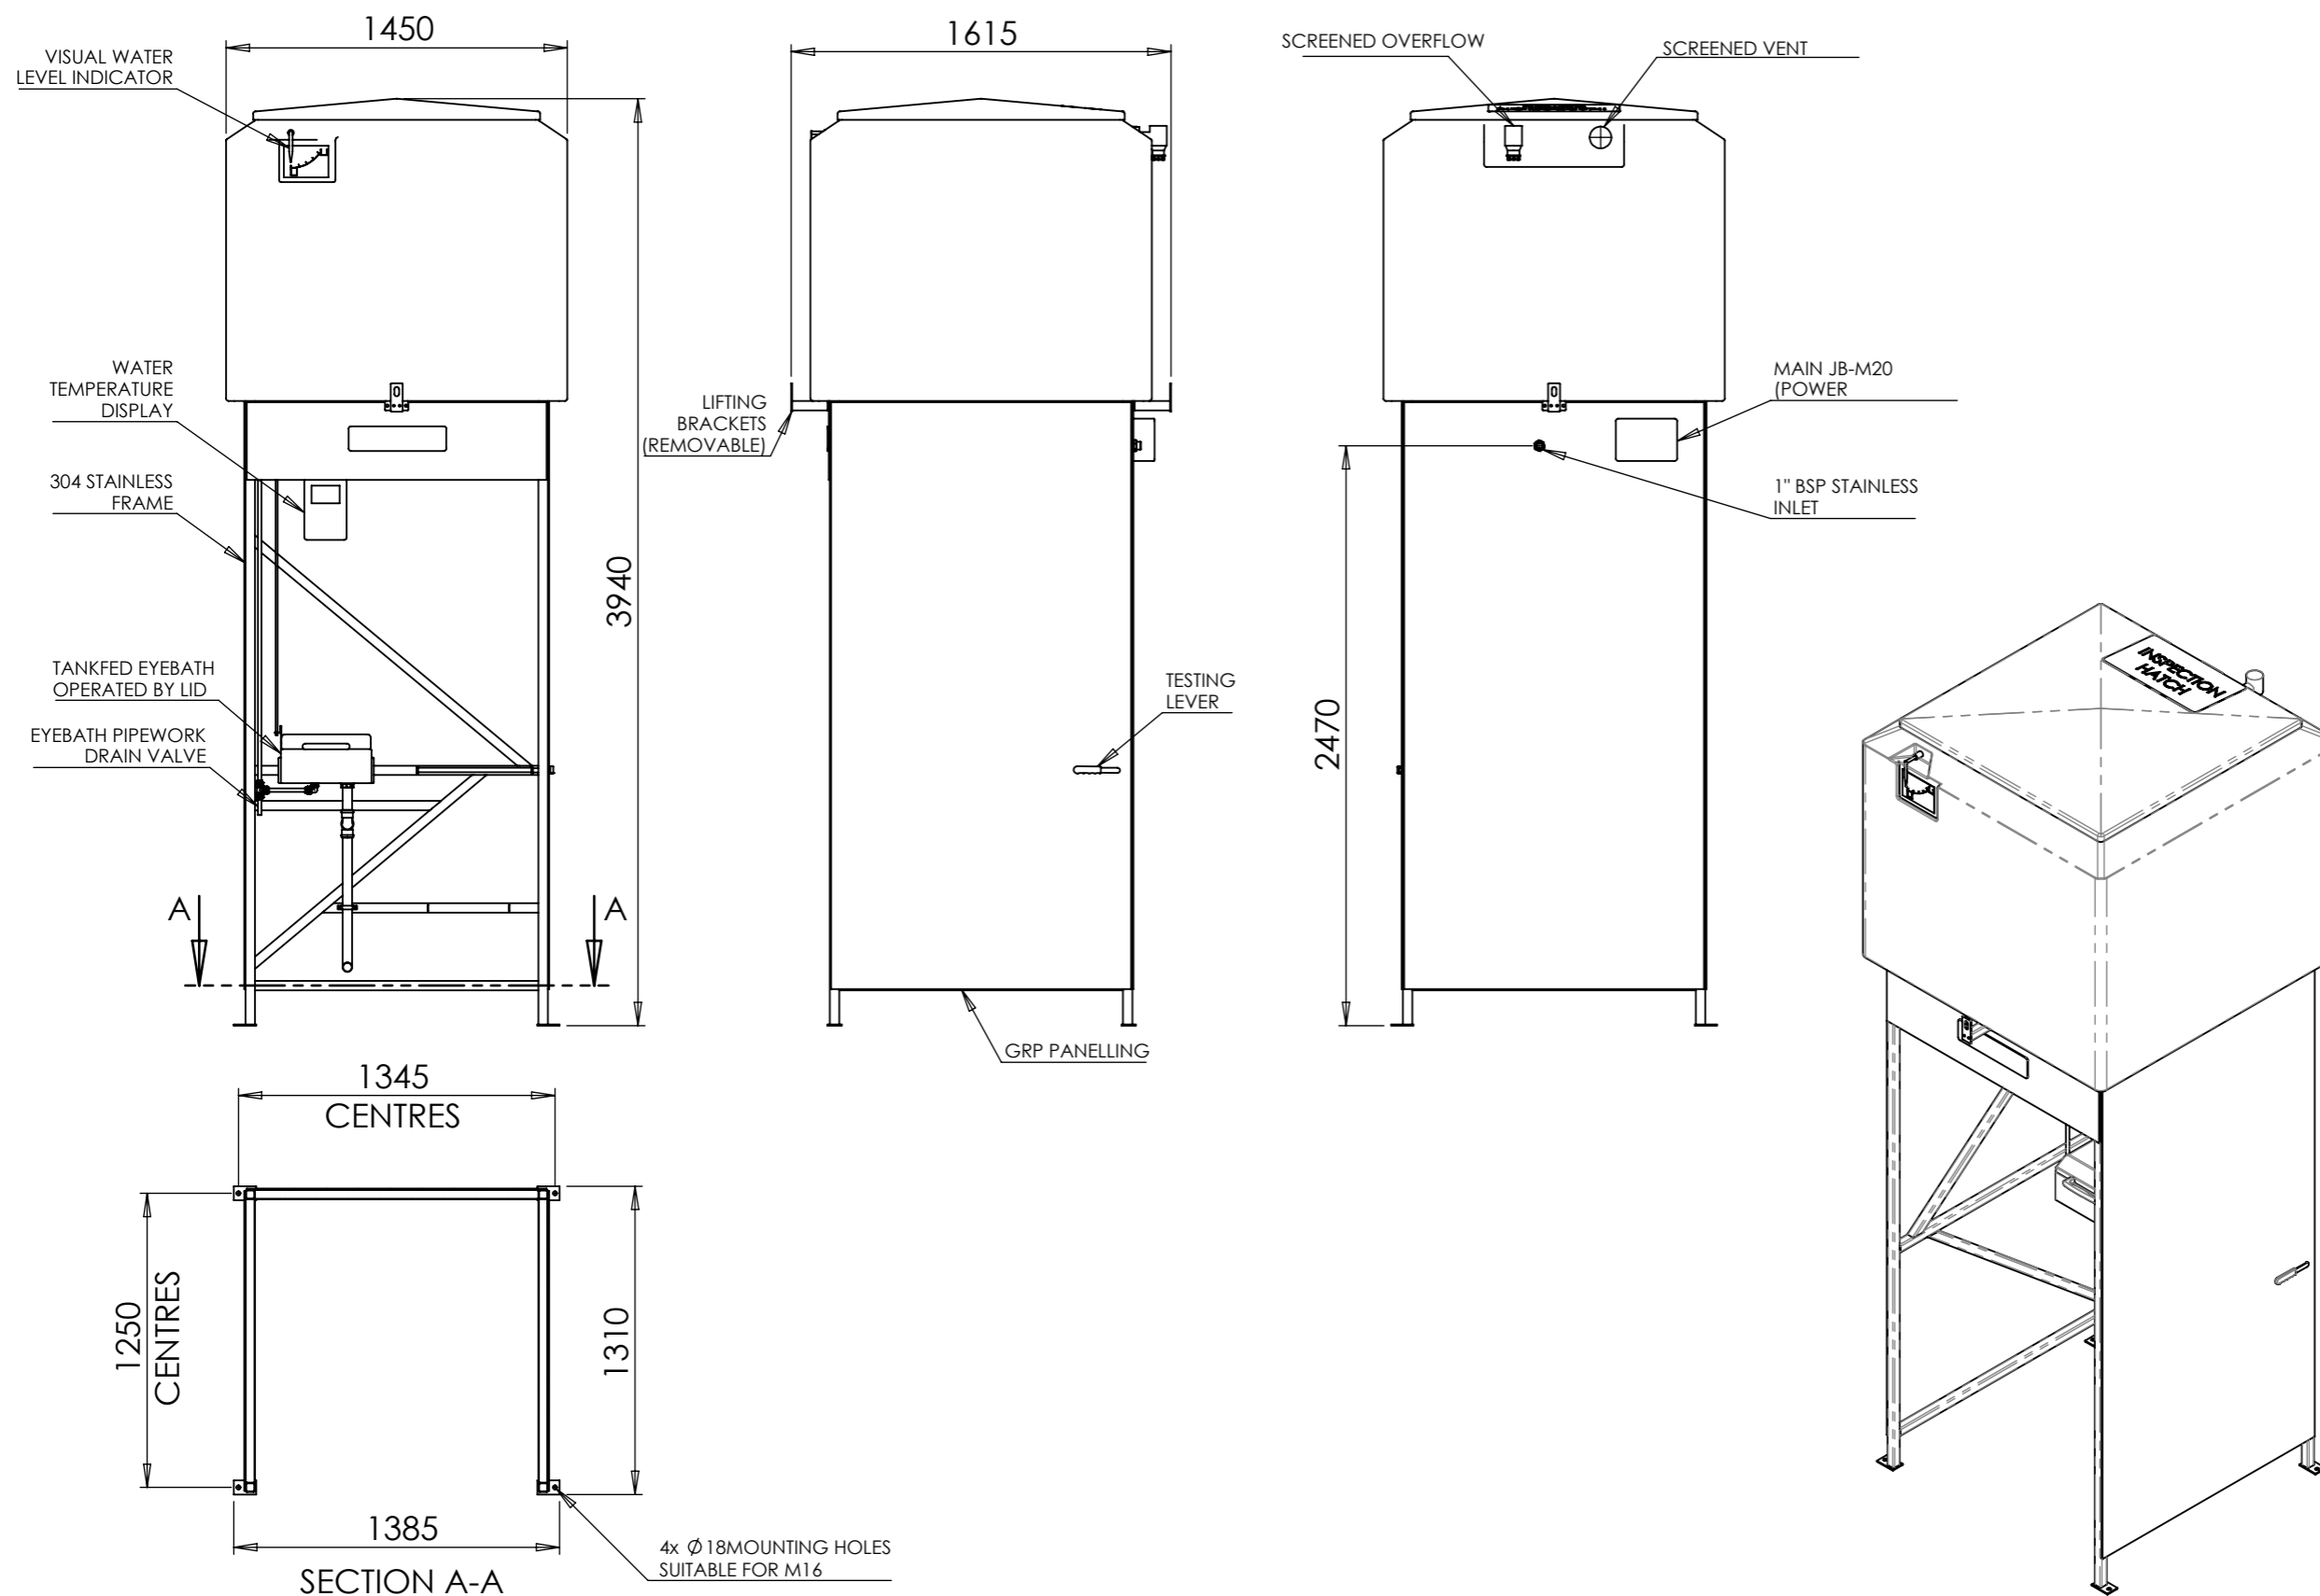

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AQUA SAFETY SHOWERS INTERNATIONAL LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AQUA SAFETY SHOWERS INTERNATIONAL LTD IS STRICTLY PROHIBITED.

DESCRIPTION

1500L TANK SHOWER

REV **A**

REV DATE: 10-08-2021

DWG NO. **ARBOLES - P3**

**A3**

